

LONGMARCH®

URBAN / HIGHWAY




LM 288

PREMIUM ALL POSITION TYRE



Features :

- Unique compound with improved wear resistance and heat build-up.
- Wider steel belts for better contact patch and footprint.
- Optimized structure for superior overall performance and mileage.
- Three zig-zag grooves suitable for all positions and special compound for mixed road applications.
- Deeper lateral sipes for better heat dissipation and improved contact in wet surface.

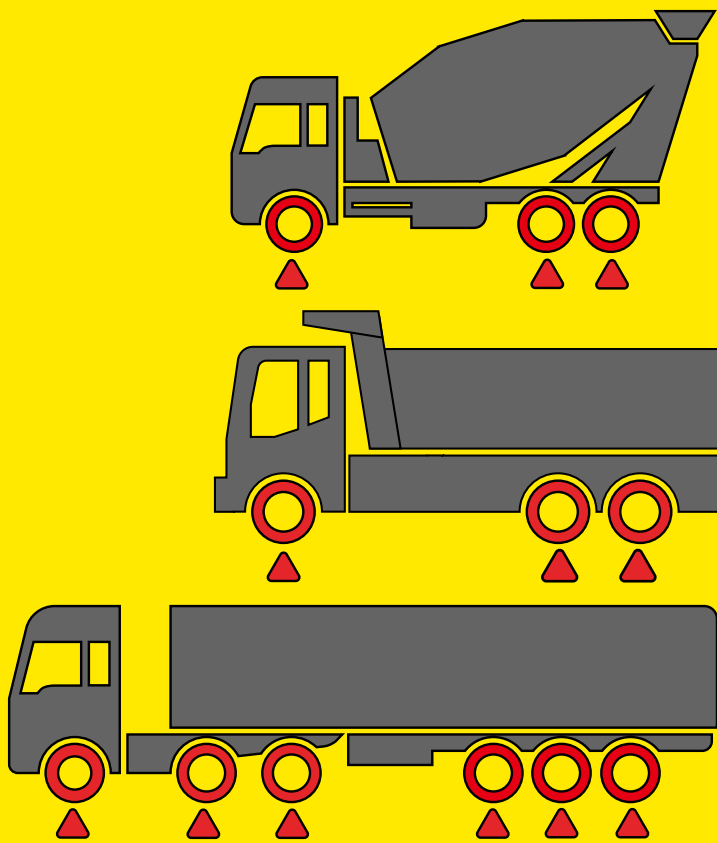

Size	Ply Rating	Load Index (Single / Dual)	Speed Symbol	Recommended Rim	Load Capacity (kgs) (Single / Dual)	Pressure (PSI)
325/95R24	22	162/160	K	8.5	4750/4500	123